

Tank Risers, Lids and Watertight Seals

Available in 12", 16", 20" and 24" diameters.

■ Free Freight on Full Cartons

Patent Numbers
5,617,679 & 5,852,901;
other pats. pending.



24" Green Riser Lid

Lid attaches with 6 vertical stainless steel screws.

Cut-out for pipe penetrations.

24" Safety Pan™.

24" Diameter Riser

Molded-in gasket.


Safety Lid
May be used in place of concrete lid. Fits 24" Riser Pan only. Black only.

NEW!

Pat Nos. 5,617,679 & 5,852,901, other pats. pending.





Stackable risers and pans with safety lid lock option.




Use for:

- Rainwater harvesting tanks
- Pump tanks
- Secondary treatment tanks
- Septic tanks



Inlet and outlet Tank Seals for watertight pipe connections

Meets pressure (13 PSI) requirements of ASTM 923

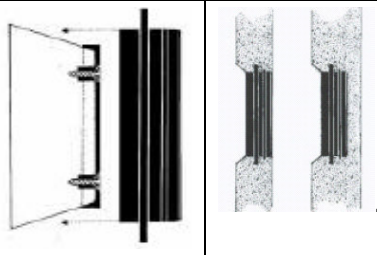

Mandrels hold the seals in place while casting them into concrete

- Risers can be added as required on site to bring to ground level.
- Watertight inlet and outlet seals can be pressure tested.
- Tanks can be tested for watertightness before leaving the premises.
- Access for maintenance and sampling can be done easily by 1 person.

Insist on good quality and watertight tanks